Grooved OS&Y gate valve

Osy-Gov

grooved os&Y Valve

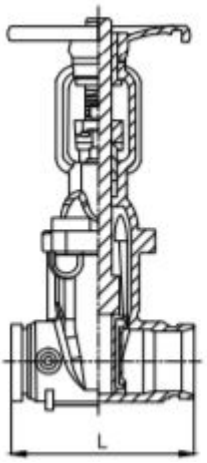

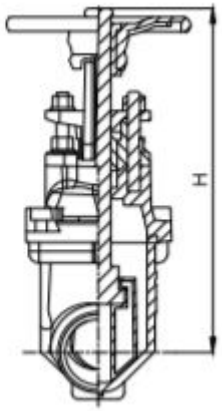

- CERtificate: FM approved, UL 262
- STANDARD: AWWA C515 GROOVED AS
-
-
- CONNECTION: AWWAC606 FACTORY
- TEST: HYDRO TEST 450 **psi** 0°C TO
- TEMPRATURE: 100°C

W. PRESSURE: 350 **psi**

SURFACE:EPOXY COATING AS RAL3000

MATERIALLIST		
	PART	SPECIFICATION
1	**Body**	Ductile Iron A536, 65-45-12
2	**Bonnet**	Ductile Iron A536, 65-45-12
3	**Resilient wedge disc**	Ductile Iron A536, 65-45-12 + EPDM
4	**STEM**	SS304 / SS420 / ss431
5	**Yoke**	Ductile Iron A536, 65-45-12
6	**Handwheel**	Ductile Iron A536, 65-45-12

dimension-weights-quantities					
Inch	DN	mm	L	H min (mm)	H min (mm)
2	50	60.3	178	348	400
3	80	88.9	203	408	490
4	100	114.3	229	471	573
6	150	165.1	267	601	755
8	200	219.1	292	774	975
10	250	273	330	1029	1283
12	300	323.8	356	1065	1370