


FIS HYDRANT LANDING VALVE




HYD -020

HYDRANT LANDING VALVE 20

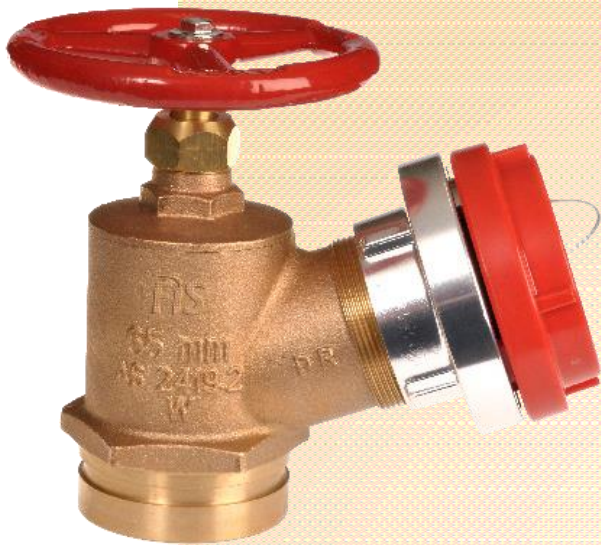

DETAILS

- Standards mark Certificate No. SMK21817
- AS 2419.2 Material C83600 AS 1565
- 2345 dezincification test Flow rate
- 10L/s when pressure $\geq 25\text{kPa}$
- Sealing torque $\leq 40\text{Nm}$ when pressure 21 bar
- Body test & seat test 27bar (2700kPa)
- Pressure retention test 32bar (3200kPa)
- Temperature Rating -10°C ~ 85°C
- Wall thickness $\geq 3\text{mm}$. Inlet roll grooved wall thickness $\geq 5.4\text{mm}$.
- Storz fitting on landing valve complies with NEN3374 1971

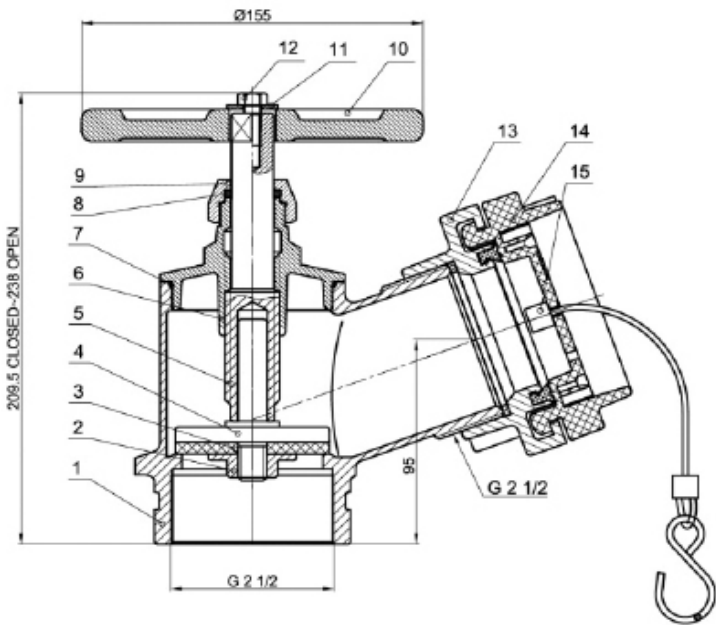

MATERIAL LIST	
NO.	PART
01	BODY
02	NUT
03	WASHER
04	SEAT
05	SPINDLE
06	COVER
07	O-RING
08	O-RING
09	COVER NUT
10	WHEEL HANDLE
11	WASHER
12	HEX BOLT
13	STORZ SUB-ASSY
14	PLUG